

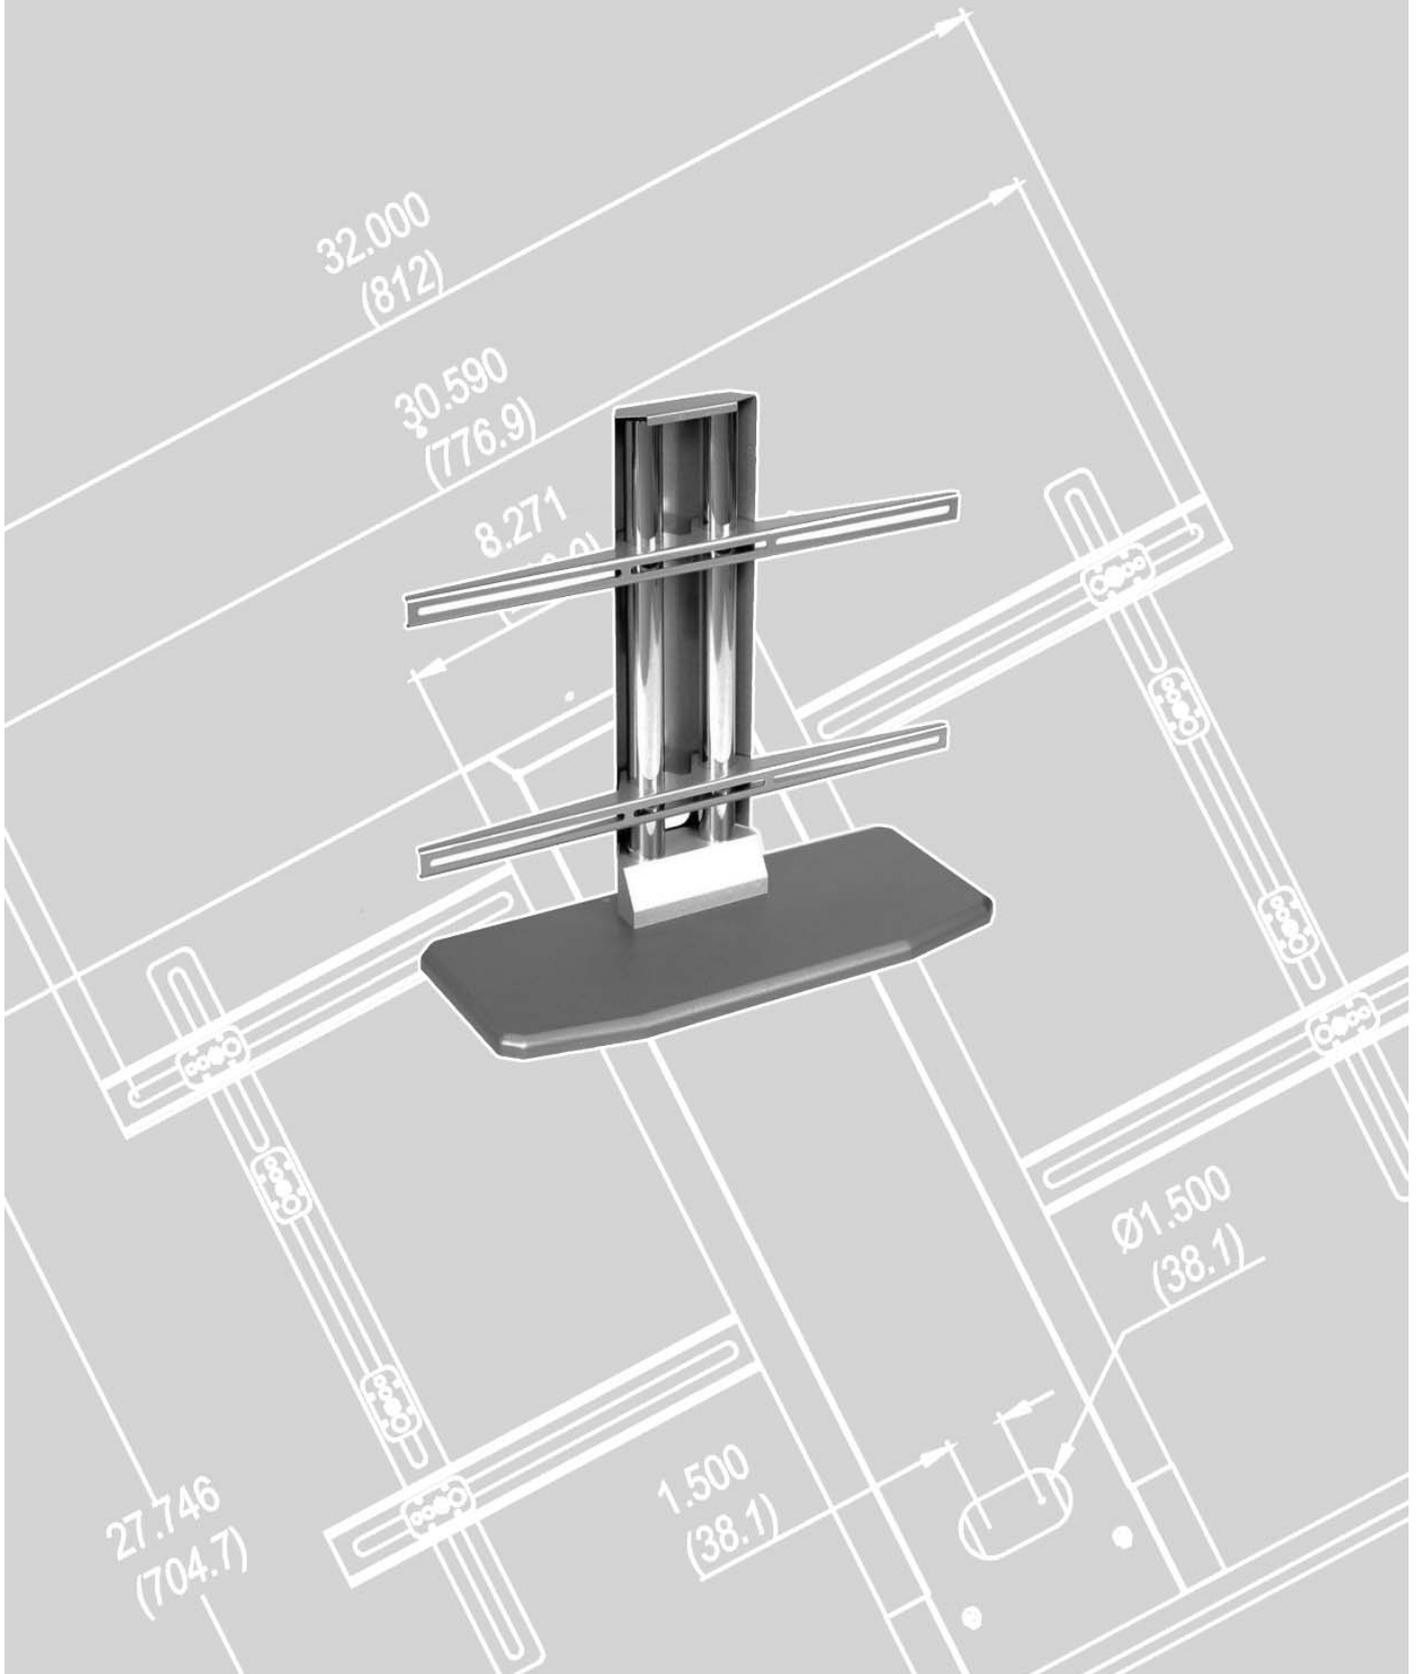





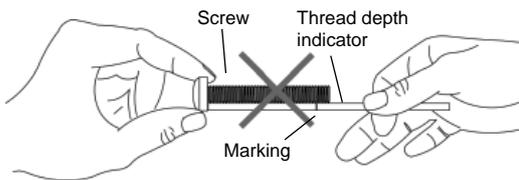


EMPRO-TS
Ergomounts Pro Series
Universal Plasma Table Stand

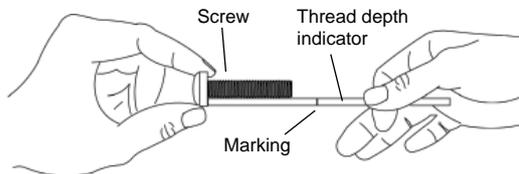


	Aluminium block (Qty 1)	Congratulations on your purchase. This is shipped with all proper installation hardware and components. Please verify that none of these parts are missing and/or damaged before assembly. If any parts are missing/damaged please stop assembly and contact ErgoMounts 01252 333326	
	Mounting Brackets (Qty 2)		
	Vertical brackets (Qty 2)		
	Griplate™ (Qty 8)		M4 x 16 (Qty 8)
	Base (Qty 1)		M4 x 25 (Qty 4)
	Back cover (Qty 1)		M5 x 16 (Qty 8)
	Tubes (Qty 2)		M5 x 20 (Qty 6)
	Allen key (Qty 1)		M5 x 25 (Qty 4)
	Thread Depth Indicator (Qty 1)		M5 x 50 (Qty 4)
	Socket Head Screws (Qty 6)		M6 x 16 (Qty 8)
	Tube caps (Qty 2)		M6 x 20 (Qty 6)
	M5 x 10 Phillips Screws (Qty 2)		M8 x 20 (Qty 6)
	Rubber feet (Qty 4)		M8 x 25 (Qty 6)
	M6 Phillips Screws (Qty 4)		M8 x 30 (Qty 6)
	M5 x 30 Phillips Flat Head Screws (Qty 5)		M8 x 35 (Qty 4)
	Wood Screws (Qty 2) Optional use		M8 x 70 (Qty 4)
	Rubber Vinyl (Qty 4)		1/4" Nylon spacers Large (Qty 6)
			1/2" Nylon spacers Large (Qty 12)
			5/16" Flat Washers (metal) (Qty 6)
			1" Nylon Spacers (Qty 6)
			1/4" Nylon Spacers (small) (Qty 6)
			9/16" Nylon Spacers (Qty 6)
			Nylon Sleeves (Qty 4)

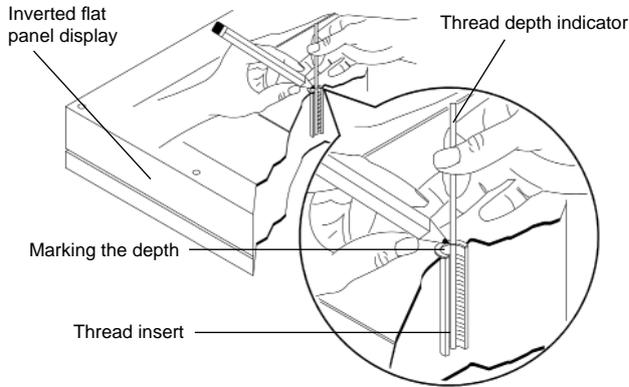

Thread Depth Indicator


- ① Insert the thread depth indicator (supplied) through the thread inserts found on the back of the flat panel to make sure the inserts measure the same full depth and mark it.
- ② Locate the correct diameter screw for the thread insert. Compare your marking to the screws supplied.
- ③ If the selected screw is longer than the marking on the thread depth indicator, **DO NOT USE** this screw.
- ④ The screw length must not bypass the marking. Select another screw size (figure 2 and 3), until you find one that comes closest to your mark without going past.

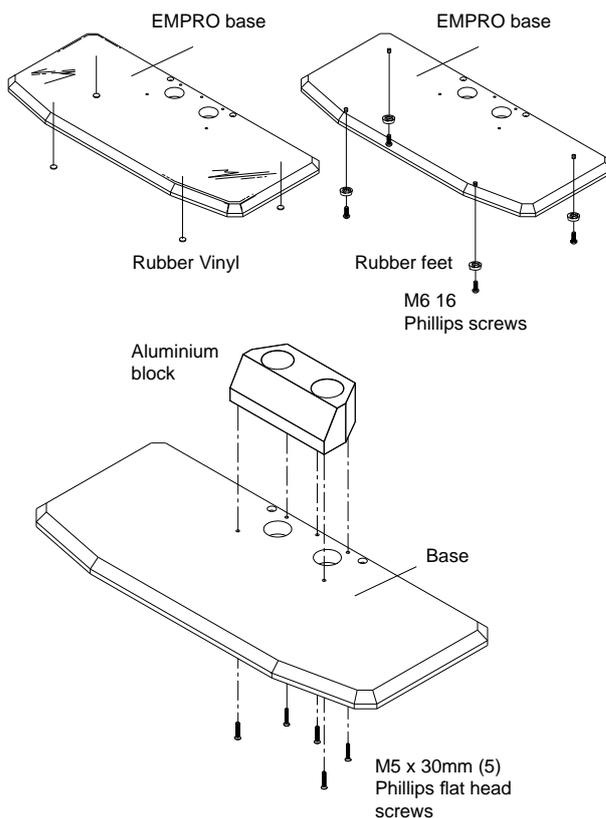


Building the Stand

Unpack the components from the box and set them on the floor. Invert and secure the rubber vinyl or rubber feet depending on model to the bottom of the base. Secure the aluminium block to the base as shown in (figure 1) to the base by using the five (5) M5 x 30mm Phillip flat head screws (supplied).

NB Do not over tighten the screws. Find a suitable location for the stand.

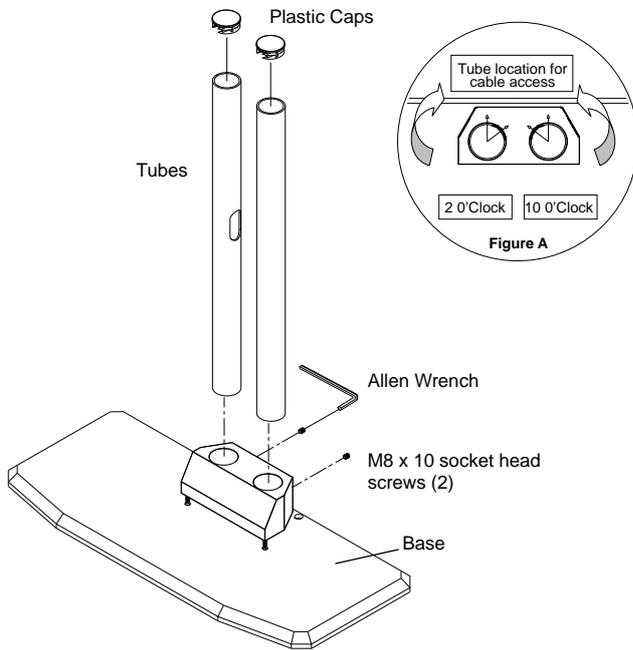


Insert the tubes into the secured aluminium block. See diagram to set the cable access openings before tightening the set screws. See figure A. Once the poles are fully inserted into the block and det to their proper positions lock the tubes by tightening the two.

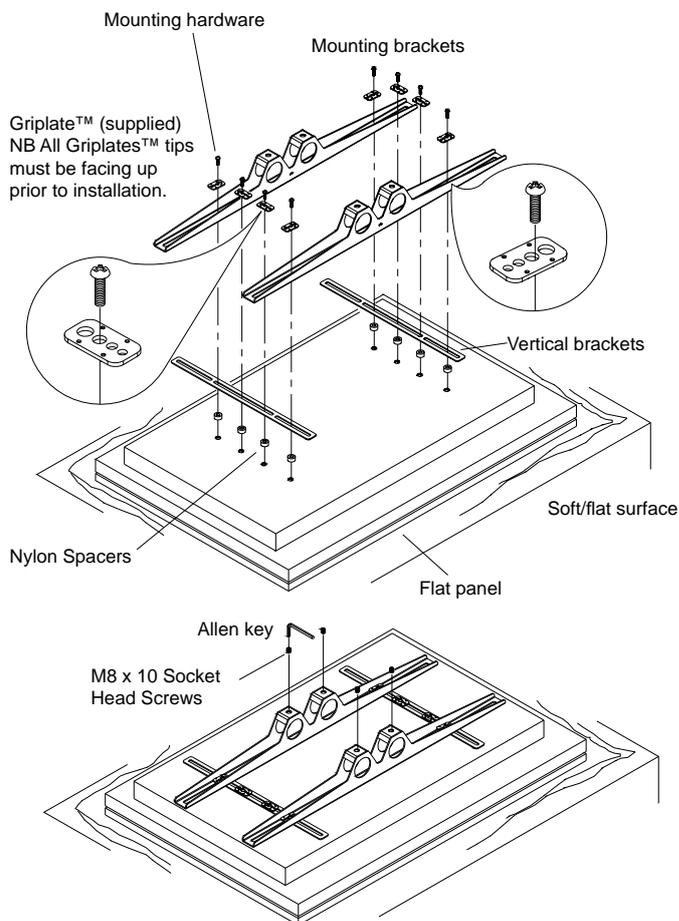

Invert the flat panel display and lay it on a soft and flat surface. Apply the vertical brackets and centre the mounting brackets from left to right on the display. Secure the mounting brackets with the hardware and griplates™ (supplied). NB the griplates™ come with M4, M5, M6 and M8 access holes. Find out what your proper hardware for your flat panel will be and use accordingly.



NB If your flat panel has more that four (4) mounting points use the vertical brackets as shown. Less than (6) mounting points, do not use the vertical brackets.

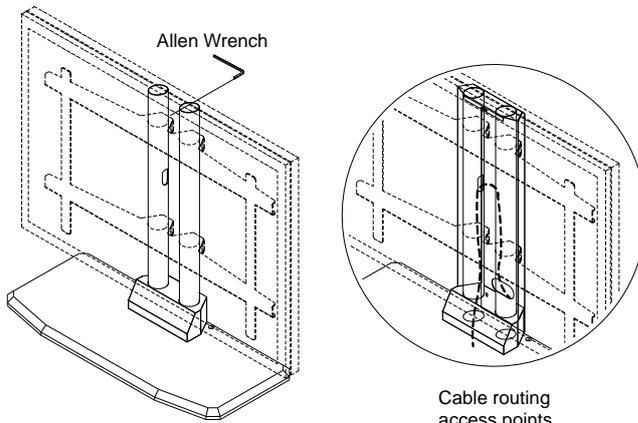

Securing the flat panel to the stand

Raise the display (see warning) and slide the mounting brackets over the tubes, set the height required and using the Allen Wrench secure the height by tightening the four (4) M8 socket head screws. Do not over tighten the screws. Make all proper connections at this time. Install the back cover plate and secure it using two (2) M5 x 10 phillips screws (supplied).


WARNING At least two qualified personnel are strongly recommended for installation of this product. Failure to do so could result in serious injury and possible damage to the flat panel.

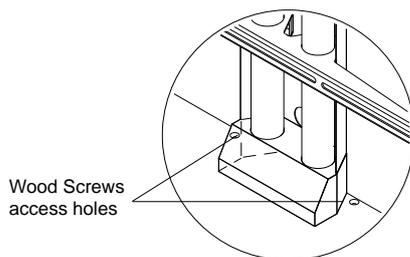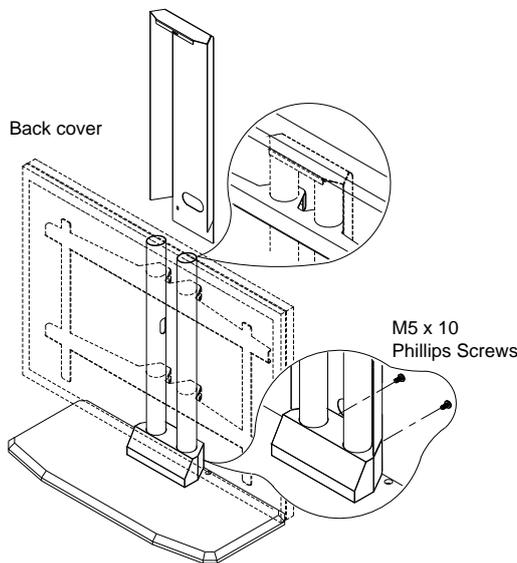


(Optional) fixed installation

If securing to a wood table, secure the stand with the two (2) #10 x 1-3/4" wood screws (supplied).

NB Longer or shorter wood screws and or mounting hardware depending on your installation environment are (commercially available).

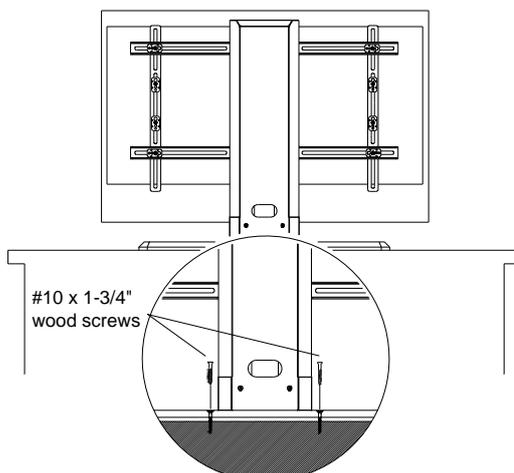

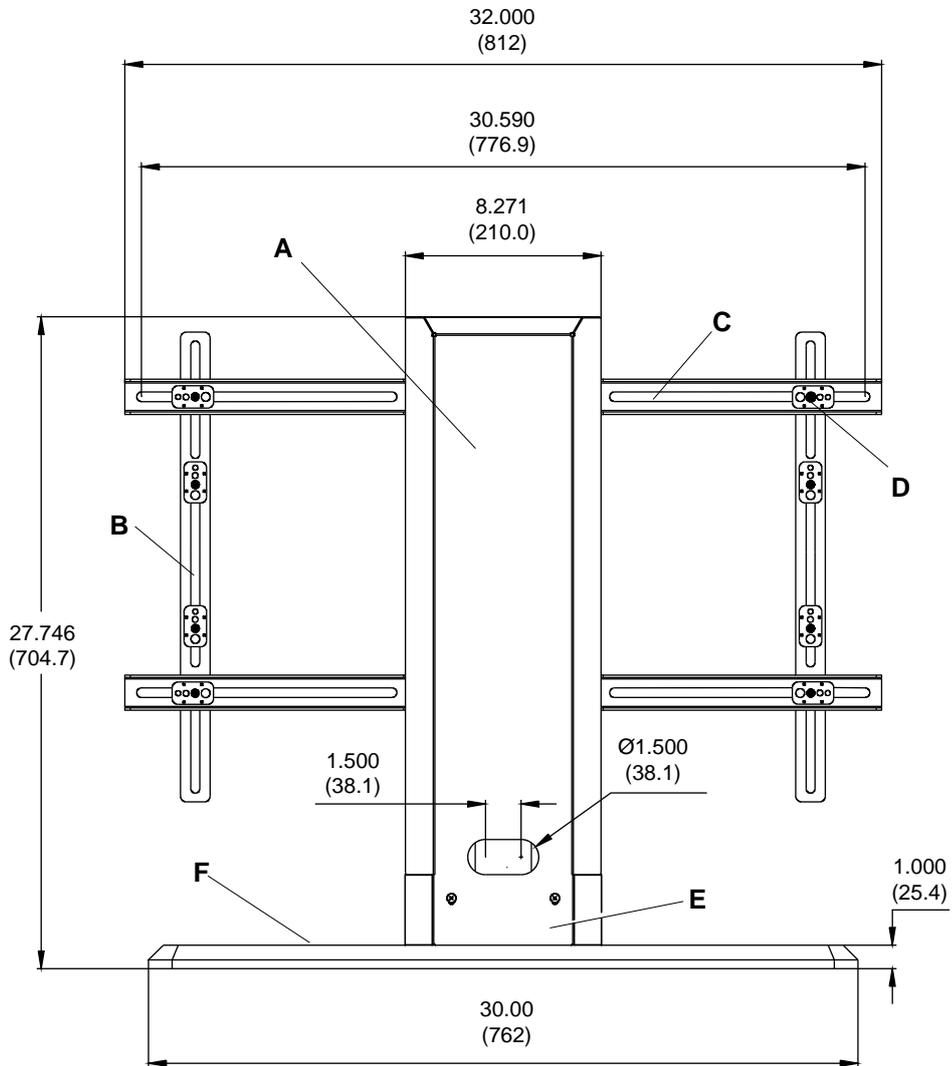

Base dimensions:
1.00" (25.4) H x 30.00" (762) W x 13.0" (330) D

- A** Back Cover
- B** Vertical Brackets
- C** Mounting Brackets
- D** Griplates™ and mounting hardware
- E** Aluminium block
- F** Base



See it your way...

ErgoMounts Limited

Unit 10
Pegasus Court
North Lane
Aldershot
Hampshire
GU12 4QP
United Kingdom

T +44 (0)1252 333326
F +44 (0)1252 330006

www.ergomounts.co.uk